

Fenestration Testing Laboratory, Inc.

10235 8th Street • Rancho Cucamonga, CA 91730 • PH. (909) 477-4343 • FAX (909) 477-4348

Report No. : T10-092
Date : September 28, 2010
Page : 1 of 4

TESTED FOR

INTERNATIONAL WINDOW CORP.

5625 East Firestone Boulevard
South Gate, CA 90280

1.0 PURPOSE

The purpose of this report is to present the testing methods employed and the test results obtained during the performance testing of one (1) **PVC Horizontal Sliding Window** described in paragraph 4.0 of this report.

2.0 TEST REFERENCES

2.1 NAFS – North American Fenestration Standard/specification for windows, doors, and skylights
AAMA/WDMA/CSA 101/I.S.2/A440-08

Class LC – PG25: Size Tested 1819 x 1515 mm (72 x 60 in) Type HS

2.2 CAWM 301 – 90 Forced Entry Resistance Tests for Windows.

2.3 ASTM F 588-07 Standard Test Method for Measuring the Forced Entry Resistance of Windows

3.0 SUMMARY

The test results in paragraphs 5.0 and 6.0 indicate that the tested sample described in paragraph 4.0 of this report complied with the performance requirements of the above referenced specifications.

4.0 SAMPLE SUBMITTED

SERIES: 5321 HS

CONFIGURATION: XO

FRAME SIZE: 1819 mm x 1515 mm (71.61” x 59.65”)

ACTIVE SASH: 895 mm x 1461 mm (35.24” x 57.52”)

FIXED LITE: 832 mm x 1441 mm (32.76” x 56.73”) Daylight Opening

GLASS: Each lite consisted of 0.75” overall wide insulated glass unit containing DS annealed glass on both sides and a 0.5” spacer.

SPACER: Each spacer was “U” shaped metal and single sealed.

GLAZING: The active sash was outside wet glazed and the fixed sash was outside tape glazed with 0.5” x 0.06” double sided adhesive foam tape. Each lite sat on 1/8” x 0.8” x 4” rubber setting block at quarter points at the bottom end. PVC snap-in glazing bead was applied full perimeter of each lite on the exterior.

WEEPAGE:

The sill was weeped as follows:

- 1) The sill outside face contained a 1.75" x 0.22" weep hole at each end. A snap-in gated weep cover was inserted in each hole.
- 2) The sill active channel contained a 0.5" diameter vertical weep at each end which drained down into the hollow. The PVC snap-in roller track was cut so as to leave a 0.25" gap at each end to allow water to drain down to the bottom of the active channel.
- 3) The fixed channel contained a 0.25" diameter vertical weep at 3" and 34" from each end.

The active sash bottom rail contained a 0.25" diameter vertical weep at each end which ran straight through from the top web and to the bottom.

WEATHERING:

The active sash contained a strip of 0.220" overall high polypile with center fin full perimeter facing out.

HARDWARE:

The active sash lock stile contained the following:

- 1) A two part metal spring loaded latch lock. The base of the lock was fastened with three #6 x 0.75" PFH screws to the lock stile. The spring loaded latch portion sat over the base and was fastened to it with a pair of #6 x 0.75" PFH screws. When locked, the latch engaged a metal keeper fastened to the fixed interlock with a pair of #6 x 0.75" PFH screws.
- 2) The bottom rail contained a tandem nylon roller in PVC housing which snap fit into a slot at each end.

The head active channel contained a PVC anti-lift at mid-span of the active sash.

CONSTRUCTION:

The frame and sash corners were mitered and fusion welded. The fixed interlock was mechanically joined to the frame with a pair of #8 x 2.5" PFH screws. The lock stile and fixed interlock were each reinforced with rolled steel.

CAULKING:

The heads of the screws that fastened the fixed interlock to the frame were sealed.

ANCHORING:

The frame was fastened to a 2" x 6" wooden rough opening with #8 x 1.5" screws every 16" through the nail-on fins at head and jambs.

5.0 TEST PROCEDURES AND RESULTS

5.1 All testing procedures were performed in accordance with the performance requirements of the test specifications referenced in paragraph 2.0 of this report.

5.2 TEST RESULTS

<u>PARAGRAPH</u>	<u>TEST DESCRIPTION</u>	<u>MEASURED</u>	<u>ALLOWED</u>
5.3.1.1	Operating Force (ASTM E 2068)		
	Breakaway Force	73 N (16.4 lbf)	Report only
	Operating Force	55 N (12.4 lbf)	115 N (25 lbf)
5.3.1.1.3	Latching Device		
	Open and Close Latch Device	18 N (4.0 lbf)	100 N (22.5 lbf)
5.3.2.1	Air Infiltration (ASTM E 283)		
	75 Pa	1.0 L/s•m ²	1.5 L/s•m ²
	(1.6 PSF)	0.2 CFM/ft ²	0.3 CFM/ft ²
The tested specimen exceeds the performance requirements specified in AAMA/WDMA/CSA 101 / I.S.2 / A440 for air leakage resistance.			

5.2 **TEST RESULTS (Continued)**

<u>PARAGRAPH</u>	<u>TEST DESCRIPTION</u>	<u>MEASURED</u>	<u>ALLOWED</u>
5.3.3.2	Water Penetration (ASTM E 547) 180 Pa (3.8 PSF) With and without screen	No Leakage	No Leakage
5.3.4.2	Uniform Load Deflection (ASTM E 330) 1200 Pa (25.0 PSF) POS 1200 Pa (25.0 PSF) NEG	24.25 mm (0.95") 22.00 mm (0.87")	Report Only Report Only
5.3.4.3	Uniform Load Structural (ASTM E 330) 1800 Pa (37.5 PSF) POS 1800 Pa (37.5 PSF) NEG	0.75 mm (0.03") 1.00 mm (0.04")	5.75 mm (0.23") 5.75 mm (0.23")
5.3.6.2	Thermoplastic Corner Welded Test Frame Vent	Pass Pass	Break Shall Not Extend along Entire Weld
5.3.6.3	Deglazing (ASTM E 987) 320 N (70 lbf) Stiles 230 N (50 lbf) Rails	13% 8%	Less than 90% Less than 90%

6.0 5.3.5 **ASTM F 588 Forced Entry Resistance Test Results for Windows**

1.2.1 Type "A" Operable Window Assemblies
Table A1.1 Grade 10

	<u>TEST</u>	<u>RESULTS</u>	<u>ALLOWED</u>
A2.4.1		Passed	No Entry
A2.4.2	A1	Passed	No Entry
A2.4.3	A2	Passed	No Entry
A2.4.4	A3	Passed	No Entry
A2.4.5	A4	Passed	No Entry
A2.4.6	A5	Passed	No Entry
A2.4.8	A7	Passed	No Entry
A2.2.1		Passed	No Entry
A2.3.1		Passed	No Entry
Fixed Panel			
A2.7.1	A2.1	Passed	No Entry
A2.7.3	A2.1	Passed	No Entry

6.0 **TEST RESULTS**

5.3.5 **CAWM 301 - 90 FORCED ENTRY RESISTANCE TEST RESULTS**

	<u>TEST</u>	<u>RESULTS</u>	<u>ALLOWED</u>
2.4.1	Type "I" Window		
5.1.1	Disassembly	Passed	No Entry
5.1.2	A	Passed	No Entry
5.1.3	B	Passed	No Entry
5.1.4	C	Passed	No Entry
5.1.5	E	Passed	No Entry
5.1.6.1	D	Passed	No Entry
5.1.7	E	Passed	No Entry
Fixed Panel			
5.4.1	A	Passed	No Entry
5.4.2	B	Passed	No Entry


For a complete description of the tested sample refer to the attached fourteen (14) pages consisting of the bill of materials, cross section drawings, and individual part drawings.

Cross section drawings and die drawings of frame members are on file and have been compared to the sample submitted. Test sample sections, drawings and a copy of this report will be retained at the test laboratory for four years.


This test report may not be modified in any way without the written consent of Fenestration Testing Laboratory.

The preceding test results relate only to the tested specimen and were obtained by using the applicable ASTM, CAWM and AAMA test methods. This report does not constitute certification of this product. Certification can only be granted by an approved administrator and/or validator.

Testing Completed: September 24, 2010
Report Completed: September 27, 2010



Pete Cruz
Test Engineer

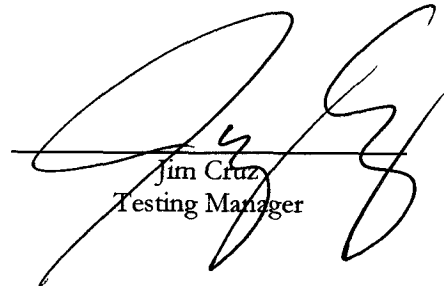

Jim Cruz
Testing Manager